

WASHDOWN HOSE

Skellerup washdown hose is made in New Zealand to withstand high pressure and abrasive working conditions.


Made from flexible PVC and rated for use between -10°C and 40°C (hose should be protected against impact below 0°C).



The recommended working pressure is 1/3 of the maximum pressure ratings below.

Internal Diameter mm	Wall Thickness mm	Outer Diameter mm	BURST		
			MPa	PSI	BAR
19	4.4	27.8	4.50	550	37
25	4.6	34.2	4.80	450	31
32	5.2	42.4	5.50	500	34
38	6.6	51.2	4.50	600	41

Wall thickness dimensions are subject to manufacturing tolerances of +/- 0.35mm

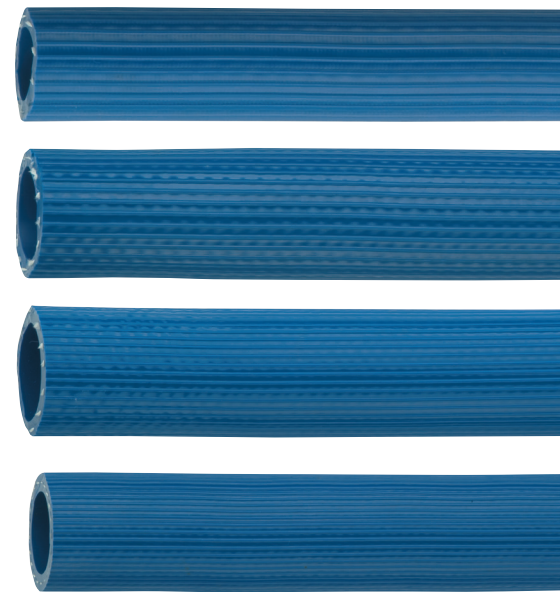

Talk to your rural retailer or visit us online skellerup.co.nz

